



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification:

B41N 3/03, 1/14, B41C 1/10

(11) International Publication Number:

WO 98/34796

A1

(43) International Publication Date:

13 August 1998 (19980813)

(21) International Application Number:

PCT/GB98/00266

(74) Agents: BRIERLEY, Anthony, Paul et al., Arpleygate Lane, 15
Clare Road, Halifax HX1 2HY (GB).

(22) International Filing Date:

9 February 1998 (19980209)

(30) Priority Data:

9702568.8

7 February 1997 (19970207)

GB

(71) Applicant (for all designated States except US): HORSELL
GRAPHIC INDUSTRIES LIMITED [GB/GB]; Nephew
Lane, South, Gildersome, Morley, Leeds LS27 7JQ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MCCULLOUGH
Christopher, David [GB/GB], 8 Pasture Close, Sher-
burn-in-Elmet, Leeds LS25 6LJ (GB); RAY, Kevin,
Barry [GB/GB], 30 Chalmer Avenue, Morley, Leeds LS27
0SD (GB); YATES, Michael, Stuart [GB/GB], 353 Lee
Hall Road, Thornhill Lees, Dewsbury WF12 9HF (GB);
GRIFFITHS, Colin, John [GB/GB], 9 Ashlea Close
Garforth, Leeds LS25 1JX (GB); SPOWAGE, Mark, John
[GB/GB], 42 Hillcrest, Swillington, Leeds LS26 8DL (GB);
BENNETT, Peter, Andrew, Reath [GB/GB], 15 Apley
Close, Harrogate HG2 8PS (GB); BHAMBRA, Harjit,
Singh [GB/GB], 90 Carr Manor Avenue, Moortown, Leeds
LS17 5BW (GB).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW,
MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,
TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO
patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT,
LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI,
CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: PLANOGRAPHIC PRINTING MEMBER AND PROCESS FOR ITS MANUFACTURE

(57) Abstract

A planographic printing member comprises a substrate (2), an oleophilic layer (4), an infra-red sensitive ablatable layer (6) and a hydrophilic layer (8). The hydrophilic layer is derived from a silicate solution, optionally containing particulate materials such as alumina and/or titania. The printing member may be exposed to radiation from a laser which ablates layer (6) to reveal areas of the oleophilic layer (4). An exposed printing member may be used in "wet" lithographic printing.

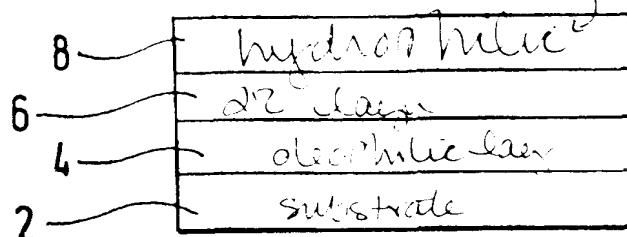

* different mechanism of ablation - involves
of the IR layer but laser is - oleophilic layer
or present indication however still not "negative"
working.
* additional
* problems *
- hydrophilic layer is not crosslinked

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PLANOGRAPHIC PRINTING MEMBER AND PROCESS FOR ITS MANUFACTURE

This invention relates to planographic printing and provides a method of preparing a planographic printing member and a planographic printing member per se. The invention particularly, although not exclusively, relates to lithographic printing.

Lithographic processes involve establishing image (printing, and non-image (non-printing) areas on a substrate, substantially on a common plane. When such processes are used in printing industries, non-image areas and image areas are arranged to have different affinities for printing ink. For example, non-image areas may be generally hydrophilic or oleophobic and image areas may be oleophilic. In "wet" lithographic printing, a dampening or fountain (water-based) liquid is applied initially to a plate prior to application of ink so that it adheres to the non-image areas and repels oil based inks therefrom. In "dry" printing, ink is repelled from non-image areas due to their release property.

There are numerous known processes for creating image and non-image areas. Recently, much work has been directed towards processes which use laser imaging, in view of the ease with which lasers can be controlled digitally.

For example, U.S. 5 339 737 (Presstek) describes lithographic printing plates suitable for imaging by means of laser devices that emit in the near-infrared region. One plate described includes a substrate having an oleophilic layer, an ablatable layer over the oleophilic layer and a top hydrophilic layer. Imagewise laser exposure ablates areas of the ablatable layer which areas (together with the portions of the hydrophilic layer fixed

- 2 -

thereto) are removed. A plate for use in wet lithographic printing which is described in U.S. 5 339 737 has a hydrophilic layer derived from polyvinyl alcohol which is a water-soluble polymer. As a result, the hydrophilic layer gradually dissolves into the water-based dampening or fountain solution, thereby leading to a gradual acceptance of ink by non-image areas. Consequently, the number of prints obtainable from such a plate is severely limited.

WO94/18005 (Agfa) describes a substrate coated with an ink receptive layer over which an ablatable layer is provided. A hardened hydrophilic layer comprising titania, polyvinyl alcohol, tetramethylorthosilicate and a wetting agent is provided over the ablatable layer. Disadvantageously, the hydrophilic layer needs to be hardened at an elevated temperature for a period of at least several hours and for some cases up to a week (see U.S. 5 462 833) in order to provide a viable product.

It is an object of the present invention to address problems associated with known planographic printing members and methods for their preparation.

According to the invention, there is provided a method of preparing a planographic printing member comprising a support, an ablatable layer and a hydrophilic layer, said method including forming said hydrophilic layer by application of a fluid comprising a silicate.

Preferably, said planographic printing member is a printing plate.

Said hydrophilic layer may be applied over said support, suitably so that it is between the support and

- 3 -

said ablatable layer or it may be applied so that said ablatable layer is between the support and said hydrophilic layer. The latter described arrangement is preferred. Preferably, the planographic printing member is arranged such that, on ablation of said ablatable layer, areas of the hydrophilic layer over areas of the ablatable layer which are ablated are removed.

Said silicate preferably does not include organic functional groups, for example alkyl groups.

Said silicate is preferably substantially water soluble. Preferably, said fluid applied in said method comprises a silicate solution, suitably an aqueous silicate solution, in which said particulate material is dispersed. Said silicate solution may comprise a solution of any soluble silicate including compounds often referred to as water glasses, metasilicates, orthosilicates and sesquisilicates. Said silicate solution may comprise a solution of a modified silicate for example a borosilicate or phosphosilicate.

Said silicate solution may comprise one or more, preferably only one, metal or non-metal silicate. A metal silicate may be an alkali metal silicate. A non-metal silicate may be quaternary ammonium silicate. Preferably, said silicate is an alkaline silicate.

Said silicate solution may be formed from silicate wherein the ratio of the number of moles of Si species, for example SiO_2 , to the number of moles of cationic, for example metal species is in the range 0.25 to 10, preferably in the range 0.25 to about 6, more preferably in the range 0.5 to 4.

- 4 -

Said silicate is most preferably an alkali metal silicate. In this case, the ratio of the number of moles of SiO_2 to the number of moles of M_2O in said silicate, where M represents an alkali metal may be at least 0.25, suitably at least 0.5, preferably at least 1, more preferably at least 1.5. Especially preferred is the case wherein said ratio is at least 2.5. Said ratio may be less than 6, preferably less than 5 and more preferably less than 4.

Preferred alkali metal silicates include lithium, sodium and potassium silicates, with lithium and/or sodium silicate being especially preferred. A silicate solution comprising only sodium silicate is most preferred.

Said fluid may comprise 2 to 30 wt% of silicate (e.g. dissolved sodium silicate solid), preferably 5 to 20 wt%, more preferably 8 to 16 wt%. The fluid may be prepared using 10 to 60 wt%, preferably 30 to 50 wt%, more preferably 35 to 45 wt% of a silicate solution which comprises 30 to 40 wt% silicate.

Said fluid preferably comprises said silicate and particulate material.

Said fluid may include 5 to 60 wt% of particulate material. Preferably, the fluid includes 10 to 50 wt%, more preferably 15 to 45 wt%, especially 20 to 40 wt% of particulate material.

The ratio of the weight of silicate to the weight of particulate material in the fluid is preferably in the range 0.1 to 2 and, more preferably, in the range 0.1 to 1. Especially preferred is the case wherein the ratio is in the range 0.2 to 0.6.

- 5 -

Said fluid may include more than 10 wt%, preferably more than 20 wt%, more preferably more than 40 wt%, especially more than 45 wt% water (including water included in, for example said silicate solution). Said fluid may include less than 80 wt%, preferably less than 70 wt%, more preferably less than 65 wt%, especially less than about 60 wt% water.

Said particulate material may be an organic or an inorganic material. Organic particulate materials may be provided by latexes. Inorganic particulate materials may be selected from alumina, silica, silicon carbide, zinc sulphide, zirconia, barium sulphate, talcs, clays (e.g. kaolin), lithopone and titanium oxide.

Said particulate material may comprise a first material which may have a hardness of greater than 8 Modified Mohs (on a scale of 0 to 15), preferably greater than 9 and, more preferably, greater than 10 Modified Mohs.

Said first material may comprise generally spherical particles. Alternatively, said material may comprise flattened particles or platelets.

Said first material may have a mean particle size of at least 0.1 μm and preferably at least 0.5 μm .

Said first material may have a mean particle size of less than 40 μm , preferably less than 20 μm , more preferably less than 10 μm .

The particle size distribution for 95% of particles of the first material may be in the range 0.01 to 150 μm .

- 6 -

preferably in the range 0.05 to 75 μm , more preferably in the range 0.05 to 30 μm .

Said first material preferably comprises an inorganic material. Said first material preferably comprises alumina which term includes Al_2O_3 and hydrates thereof, for example $\text{Al}_2\text{O}_3 \cdot 3\text{H}_2\text{O}$. Preferably, said material is Al_2O_3 .

Said particulate material in said fluid may include at least 20 wt%, preferably at least 30 wt% and, more preferably, at least 40 wt% of said first material. Said fluid may include 5 to 40 wt%, preferably 5 to 30 wt%, more preferably 7 to 25 wt%, especially 10 to 20 wt% of said first material.

Said particulate material may comprise a second material. Said second material may have a mean particle size of at least 0.001 μm , preferably at least 0.01 μm . Said second material may have a mean particle size of less than 10 μm , preferably less than 5 μm and, more preferably, less than 1 μm .

Mean particle sizes of said first and second materials suitably refer to the primary particle sizes of said materials.

Said particulate material in said fluid may include at least 20 wt%, preferably at least 30 wt% and, more preferably, at least 40 wt% of said second material. Said fluid may include 5 to 40 wt%, preferably 5 to 30 wt%, more preferably 7 to 25 wt%, especially 10 to 20 wt% of said second material.

- 7 -

Said second material is preferably a pigment. Said second material is preferably inorganic. Said second material is preferably titanium dioxide.

5 Said first and second materials preferably define a multimodal, for example a bimodal particle size distribution.

10 Where the fluid comprises a silicate and said particulate material comprises a first material and a second material as described, the ratio of the wt% of silicate (e.g. dissolved sodium silicate solid) to the wt% of said first material may be in the range 0.25 to 4, preferably in the range 0.5 to 1.5 and more preferably about 1. Similarly, the ratio of the wt% of silicate to
15 the wt% of said second material may be in the range 0.25 to 4, preferably in the range 0.5 to 1.5 and more preferably about 1. The ratio of the wt% of first material to the wt% of second material may be in the range 0.5 to
20 2, preferably in the range 0.75 to 1.5, more preferably about 1 to 1.

25 Said particulate material may include a third material which is preferably adapted to lower the pH of the fluid. Said third material may be a colloid, suitably colloidal silica or an inorganic salt, suitably a phosphate, with aluminium phosphate being preferred. Where a third material is provided, preferably less than
30 30wt% more preferably less than 20wt%, especially less than 10wt% of said particulate material is comprised by said third material.

35 The pH of said fluid may be greater than 9.0, is preferably greater than 9.5 and, more preferably, greater than 10.0. Especially preferred is the case wherein the

- 8 -

pH is greater than 10.5. The pH is suitably controlled so that the silicate remains in solution and does not form a gel. A gel is generally formed when the pH of a silicate solution falls below pH9. The pH of said fluid is preferably less than 14, more preferably less than 13. The pH of the fluid is believed to be important, in some cases, for ensuring adequate adhesion of the hydrophilic layer to an underlying layer.

The fluid may include other compounds for adjusting its properties. For example, the fluid may include one or more surfactants. Said fluid may include 0 to 1 wt% of surfactant(s). A suitable class of surfactants comprises anionic sulphates or sulphonates. The fluid may include viscosity builders for adjusting the viscosity. Said fluid may include 0 to 10 wt%, preferably 0 to 5 wt% of viscosity builder(s). Also, the fluid may include dispersants for dispersing the inorganic particulate material throughout the liquid. Said fluid may include 0 to 2 wt% of dispersant(s). A suitable dispersant may be sodium hexametaphosphate.

Hydrophilic layers of planographic printing plates have been proposed which incorporate organic polymers, for example polyvinyl alcohol and/or polyvinyl acetate. Said fluid used in the method of the present invention may include less than 30 wt%, preferably less than 15 wt%, more preferably less than 5 wt%, especially less than 1 wt% of polyvinyl alcohol and/or polyvinyl acetate and/or any other organic polymeric or polymerizable material.

Said fluid may have a viscosity of less than 100 centipoise when measured at 20°C and a shear rate of 200s⁻¹ using a Mettler Rheomat 180 Viscometer incorporating a double gap measuring geometry. Preferably, said viscosity

- 9 -

is less than 50 centipoise, more preferably less than 30 centipoise when measured as aforesaid. Especially preferred is the case wherein the viscosity is less than 20 centipoise.

5

Said fluid may be applied to said support by any suitable means which is preferably non-electrochemical.

10 Said fluid may be applied to both sides of said support in order to form a hydrophilic layer over both sides. A support with such a layer over both sides may be used to prepare a double-sided lithographic plate. Said fluid is preferably applied over only one side of said support.

15

Said fluid may be applied to form a hydrophilic layer having an average thickness after drying, of less than 20 μm , preferably less than 10 μm and, more preferably, less than 5 μm . Especially preferred is the case wherein the
20 average thickness is less than 3 μm .

The thickness of the hydrophilic layer may be greater than 0.1 μm , preferably greater than 0.3 μm and, more preferably, greater than 0.5 μm .

25

Said particulate material (when provided) preferably defines formations in said hydrophilic layer which render said layer non-planar.

30

The method preferably includes the steps of providing suitable conditions for the removal of water from the fluid after it has been applied. Suitable conditions may involve passive or active removal of water and may comprise causing an air flow over the hydrophilic layer
35 and/or adjusting the humidity of the air. Preferably, the

- 10 -

method includes the step of arranging the support over which said hydrophilic layer has been applied in a heated environment. Said support may be placed in an environment so that its temperature does not exceed 230°C, preferably
5 does not exceed 200°C and, more preferably, does not exceed 175°C. Especially preferred is the case wherein the support temperature does not exceed 150°C. The support may be arranged in the heated environment for less than 180 seconds, preferably less than 120 seconds and, more
10 preferably, less than 100 seconds. Advantageously, it is found that no further prolonged treatment of the hydrophilic layer is needed to produce a useful printing member.

15 The method may include the further step of treating the hydrophilic layer with a liquid to adjust its properties. For example, the pH of the surface of the hydrophilic layer may be adjusted, for example by contacting the surface with aluminium sulphate.

20 Said support may be any type of support used in printing. For example, it may comprise a cylinder or a plate. The latter is preferred.

25 Said support may include a metal surface over which said ablatable layer and hydrophilic layer are provided. Preferred metals include aluminium, steel, tin or alloys of any of the aforesaid, with aluminium being most preferred of the aforesaid. Said metal may be provided
30 over another material, for example over plastics or paper.

Alternatively, said support may not include a metal surface described, but may comprise plastics, for example a polyester, or a coated paper, for example one coated
35 with a polyalkylene material, for example polyethylene.

- 11 -

Where the ablatable layer is provided between the support and the hydrophilic layer, an oleophilic surface is preferably defined between the support and ablatable layer, suitably so that said oleophilic surface and said
5 ablatable layer are abutting. Said oleophilic surface may be defined by an oleophilic layer which may be a resin, for example a phenolic resin.

Said ablatable layer is suitably arranged to ablate
10 on application of radiation, for example by means of a laser preferably arranged to emit in the infrared region and, more preferably, arranged to emit in the near-IR region, suitably between 700 and 1500 nm. Preferably, the λ (max) of the radiation is in the range 700 to 1500
15 nm. Said laser may be a solid state laser (often referred to as a semi-conductor laser) and may be based on gallium aluminium arsenide compounds.

Said ablatable layer may include a first binder and
20 a material capable of converting radiation into heat or may consist essentially of a substantially homogenous material which is inherently adapted to be ablated.

Preferred first binders are polymeric, especially
25 organic polymers, and include vinylchloride/vinylacetate copolymers, nitrocellulose and polyurethanes.

Preferred materials for converting radiation into heat include particulate materials such as carbon black
30 and other pigments, metals, dyes and mixtures of the aforesaid.

Said ablatable layer may include a second binder material adapted to increase the adhesion of the ablatable
35 layer to said hydrophilic layer as compared to when said

- 12 -

second material is not present. Said second binder material is preferably inorganic. It is preferably a material which is described herein as an essential or optional component of the hydrophilic layer. Preferably,
5 said second binder material is a particulate material with titanium dioxide being especially preferred.

Where the ablatable layer comprises a substantially homogenous material as described, it may comprise a layer
10 of metal. Suitable metals may be selected from aluminium, bismuth, platinum, tin, titanium, tellurium or mixtures thereof or alloys containing any of the aforesaid. Preferably, said layer of metal is selected from aluminium and titanium or alloys thereof.

15 The ablatable layer may have a thickness of at least 50 nm, preferably at least 100 nm, more preferably at least 150 nm, especially 200 nm or more. The ablatable layer may have a thickness of less than 10 μm , suitably
20 less than 8 μm , preferably less than 6 μm , more preferably less than 4 μm , especially 2 μm or less.

The ablatable layer and hydrophilic layer may be contiguous.

25 In some cases, it may be desirable to arrange a binder layer between the ablatable and hydrophilic layers suitably for adhesion purposes. Said binder layer may comprise a polymeric, for example an organic polymeric
30 material, optionally in combination with an inorganic material, especially an inorganic particulate material. A preferred material for said binder layer may be selected from resins, latexes and gelatin or gelatin derivatives. Said binder layer preferably includes a material which is
35 described herein as an essential or optional component of

- 13 -

said hydrophilic layer. Said binder layer preferably includes titanium dioxide.

5 In other cases, it may be desirable to treat the
ablatable layer prior to providing said hydrophilic layer
over said ablatable layer. Preferred treatments are
arranged to modify the exposed surface of the ablatable
layer and may include the use of solvent etches or a
corona discharge. In some circumstances, for example when
10 said ablatable layer comprises titanium, said ablatable
layer may be subjected to a surface treatment which may
comprise contacting the surface of an ablatable layer with
an alkaline solution, for example comprising a
metasilicate.

15

The invention extends to a planographic printing
member preparable by the method described.

20 The invention further extends to a planographic
printing member comprising a support, an ablatable layer
and a hydrophilic layer, said hydrophilic layer comprising
a material, for example a binder material, derived or
derivable from a silicate.

25 Said binder material may be derived from at least
60wt%, preferably at least 70 wt%, more preferably at
least 80 wt%, especially at least 90 wt% silicate. Most
preferably, said binder is derived essentially completely
from silicate.

30

Said silicate may be as described in any statement
herein.

35 Preferably, particulate material is dispersed in said
binder material.

- 14 -

Said particulate material may be as described in any statement herein.

5 Preferably, 30 to 80 wt%, more preferably 40 to 70 wt%, of said hydrophilic layer is composed of said particulate material.

10 Said particulate material preferably includes a first material as described in any statement herein.

Said first material may have a mean particle size and/or particle size distribution as described above for said first material when in said fluid.

15 Said particulate material on said substrate may include at least 20 wt%, preferably at least 30 wt%, more preferably, at least 40 wt% of said first material.

20 Said particulate material preferably includes a second material as described in any statement herein.

25 Said second material may have a mean particle size and/or particle size distribution as described above for said second material when in said fluid.

Said particulate material on said substrate may include at least 20 wt%, preferably at least 30 wt%, more preferably, at least 40 wt% of said second material.

30 In the layer, the ratio of the wt% of first material to the wt% of second material may be in the range 0.5 to 2, preferably in the range 0.75 to 1.5, more preferably, about 1 to 1.

- 15 -

Said particulate material may include a third material as described in any statement herein.

Said hydrophilic layer may include less than 30 wt%, preferably less than 15 wt%, more preferably less than 5 wt%, especially less than 1 wt% of organic polymeric material.

Said hydrophilic layer preferably has an average thickness of less than 20 μm , preferably less than 10 μm and, more preferably, less than 5 μm .

Said hydrophilic layer preferably has an average thickness of greater than 0.1 μm , preferably greater than 0.3 μm , more preferably, greater than 0.5 μm .

Said hydrophilic layer may have an R_a , measured using a stylus measuring instrument (a Hommelmeter T2000) with an LV-50 measuring head, in the range 0.1 to 2 μm , suitably in the range 0.2 to 2 μm , preferably in the range 0.2 μm to 1 μm , more preferably in the range 0.3 to 0.8 μm , especially in the range 0.4 to 0.8 μm .

Said hydrophilic layer may include 1 to 20 g of material per metre squared of substrate. Preferably said layer includes 5 to 15 g, more preferably 8 to 12 g, of material per metre squared of substrate. Most preferably, said layer includes about 10 g of material per metre squared.

30

It is believed that said binder material derived from a silicate of the type described contains extremely small three-dimensional silicate polymer ions carrying a negative charge. Removal of water from the system as described is believed to cause condensation of silanol

- 16 -

groups to form a polymeric structure which includes -Si-O-Si- moieties. Accordingly, the invention extends to a planographic printing member comprising a support, an ablatable layer and a hydrophilic layer which includes a binder material comprising a polymeric structure which includes -Si-O-Si- moieties. Preferably a particulate material is arranged in said binder material.

The invention further extends to a planographic printing member comprising a support, an ablatable layer and a hydrophilic layer, wherein said ablatable layer includes a binder material adapted to increase the adhesion of the ablatable layer to the hydrophilic layer as compared to when said second material is not present.

The invention further extends to a method of preparing a planographic printing member having ink-accepting and non-ink-accepting areas, the method comprising exposing a planographic printing member as described in any statement herein to radiation to cause the ablatable layer of the member to ablate.

In a preferred embodiment, said method comprises exposing a planographic printing member comprising a support, an ablatable layer and a hydrophilic layer which includes a material derived or derivable from a silicate, to radiation which causes ablation of said ablatable layer in exposed areas.

Said radiation delivered in said method is preferably delivered using a laser. A preferred type of laser has been described above. The power output of a laser used in the method may be in the range 40 mW to 10,000 mW, suitably in the range 40 mW to 5,000 mW, preferably in the

- 15 -

range 40 mW to 2,500 mW, more preferably in the range 40 mW to 1,000 mW, especially in the range 40 mW to 500 mW.

5 The invention further extends to a method of printing using a planographic printing plate as described in any statement herein, the method using a fountain fluid and ink. Thus, the method is preferably a "wet" printing method.

10 Any feature of any invention or embodiment described herein may be combined with any feature of any other invention or embodiment described herein.

15 The invention will now be described by way of example, with reference to figures 1 to 4 which are schematic cross-sections through various lithographic plates.

The following products are referred to hereinafter:

20

BKR 2620 Trade Mark: Bakelite phenolic resin - refers to a phenol-formaldehyde-cresol resin of formula $(CH_2O, C_6H_4O, CH_3O)_n$, obtained from Georgia-Pacific Resins Inc, Decatur, Georgia, USA.

25

Microolith Black C-K (Trade Mark) - refers to carbon black predispersed in vinyl chloride/vinyl acetate copolymer obtained from Ciba Pigments of Macclesfield, England.

30

Luconyl Black 2046 Trade Mark - refers to carbon black 41 wt% in water butylglycol obtained from East Pigment, Cheshire, England.

- 18 -

5 Neorez R 961 (Trade Mark) - refers to a dispersion of aliphatic urethane (34 wt%) in water (47.3 wt%), N-methyl-2-pyrrolidone (17 wt%) and triethylamine (1.7 wt%) obtained from Zeneca Resins of AC-Waalwijk, Holland.

Epikote 1004 (Trade Mark) - an epoxy resin obtained from Shell Chemicals of Chester, England.

10 Dispercel Tint Black STB-E (Trade Mark) - a carbon black/plasticised nitrocellulose dispersion obtained from Runnymede Dispersions Limited of Gloucestershire, England.

15 Nitrocellulose DHX 3-5 (Trade Mark) - high nitrogen grade (11.7 - 12.2%) nitrocellulose in chip form, obtained from ICI Explosives of Ayrshire, Scotland.

20 Dowfax 2A1 (Trade Mark) - refers to an anionic surfactant comprising a mixture of mono- and di-sulphonates from Dow Chemicals of Middlesex, England.

25 Titanium dioxide - refers to rutile titanium dioxide provided with an inorganic coating of Al_2O_3 , ZnO and ZnPO_4 . The mean crystal size is $0.23 \mu\text{m}$. It was obtained from Tioxide (Europe) of Billingham, England.

30 In the figures, the same or similar parts are annotated with the same reference numerals.

- 19 -

Example 1Preparation of Aluminium

A 0.3 mm gauge aluminium alloy sheet of designation
5 AA1050 was cut to a size of 230 mm by 350 mm, with the
grain running lengthways. The sheet was then immersed face
up in a solution of sodium hydroxide dissolved in
distilled water (100g/l) at ambient temperature for 60
seconds and thoroughly rinsed with water.

10

Example 2Oleophilic formulation

- comprises a solution of BKR 2620 thermosetting phenolic
15 resin (resole) (10 wt%) dissolved in methoxypropanol (90
wt%).

Example 3IR sensitive/ablatable formulations

20

Formulation A

- comprises a 5 wt% dispersion of Microlith Black C-K in
methylethylketone (95 wt%).

25 Formulation B

- comprises nitrocellulose DHX 3-5 (4.13 wt%), Dispercel
Tint Black STB-E (8.13 wt%) in methylethylketone (87.77
wt%).

30 Formulation C

- comprises Neorac R691 (55 wt%), Lubonyl Black (24 wt%)
and water (20 wt%).

- 20 -

Formulation D

- comprises a dispersion of Microlith Black C-K (1.0g), titanium dioxide (2.0g) in methylethylketone (12.0g).

5 Formulation E

- comprises a dispersion of nitrocellulose DHX 3-5 (0.7g), Dispercel Tint Black STB-E (1.25g), titanium dioxide (4.0g) in methylethylketone (23.0g).

10 Formulation F

- comprises Neorez R961 (3.0g), Luconyl Black 0066 (1.25g), titanium dioxide (4.0g) and water (20.0g).

Example 4

Binder formulation

Formulation G

5 - comprises Epikote 1004(3g), titanium dioxide (10g) dispersed in methyl lactate (46.3g) and benzyl alcohol (0.7g).

Example 5

Hydrophilic coating formulation

10 Formulation H

The following reagents were used in the preparation:

15 - Sodium silicate solution having a ratio $\text{SiO}_2 : \text{Na}_2\text{O}$ in the range 3.17 to 3.45 (average about 3.3); a composition of 27.1 - 28.1 wt% SiO_2 , 8.4 - 8.8 wt% Na_2O , with the balance being water; and a density of about 75 Twaddell ($^{\circ}\text{Tw}$), equivalent to 39.5 Baumé ($^{\circ}\text{Bé}$) and a specific gravity of 1.375.

20

- Deionised water having a resistivity of 5 Mohm.cm

- 21 -

- Al_2O_3 powder comprising alumina (99.8%) in the shape of hexagonal platelets. The mean particle size is 3 μm . The powder has a hardness of 9 Moh (on a 0 - 10 hardness scale).

5

10

15

20

Deionised water (48g; 24 wt%) and sodium silicate solution (80 g; 40 wt%) were added to a 250ml beaker and the solution sheared using a Silverson high shear mixer operating at maximum speed. Titanium dioxide powder (36g; 18 wt%) was then added in portions of approximately 2g every ten seconds. On completion of the addition, the liquid was sheared for a further two minutes. Then, alumina powder (36g; 18 wt%) was added in portions of approximately 2g every ten seconds. On completion of the addition, the liquid was sheared for a further two minutes. Finally, Dowfax 2A1 (0.18 wt%) was added with stirring. The viscosity of the liquid was found to be about 10 centipoise when measured at 20°C and a shear rate of 200s⁻¹ using a Mettler Rheomat 130 Viscometer incorporating a double gap measuring geometry.

Preparation of lithographic plates

25

30

In Examples 6 to 8, lithographic plates were prepared having the construction shown in Figure 1, wherein reference 2 represents a substrate, reference 4 represents an electrodeposited layer, reference 5 represents an IR sensitive/ablatable layer and reference 6 represents a hydrophilic layer.

- 22 -

Example 6

An aluminium substrate, prepared as described in Example 1, was coated using a Meyer bar with the
5 oleophilic formulation of Example 2 to give a wet film weight of about 1.2 gm² and oven-dried at 160°C for 5 minutes to produce oleophilic layer 4.

Layer 4 was then coated using a Meyer bar with
10 Formulation A to give a wet film weight of about 0.5 gm² and oven-dried at 130°C for 30 seconds to produce a layer 6.

Layer 6 was then coated using a Meyer bar with
15 Formulation H to give a wet film weight of about 8 gm² and oven-dried at 130°C for 80 seconds to produce a hydrophilic layer 8. This was then post-treated by immersion in aluminium sulphate (0.1M) for thirty seconds, followed by spray rinsing with tap water and fan drying.

20

Examples 7 and 8

The procedure of Example 6 was followed except that Formulation B (Example 7) and Formulation C (Example 8)
25 were used instead of Formulation A to produce an ablatable layer 4.

In Examples 9 to 11, lithographic plates were prepared having the construction shown in Figure 2,
30 wherein a binder layer 10 is arranged between layers 6 and 8 of figure 1.

- 23 -

Example 9

The procedure of Example 6 was followed except that Formulation G was coated over layer 6, before coating with Formulation H as described above to produce hydrophilic layer 8.

Examples 10 and 11

The procedure of Example 9 was followed except that Formulation B (Example 10) and Formulation C (Example 11) were used instead of Formulation A to produce an ablatable layer 4.

In Examples 12 to 14, lithographic plates were prepared having the construction shown in Figure 3, wherein a layer 12 which is IR sensitive/ablatable and arranged to bind layer 8 to layer 4 is provided between layers 8 and 4.

Example 12

The procedure of Example 6 was followed except that layer 4 was coated, using a Meyer bar, with Formulation D to give a wet film weight of about 2.5 gm² and oven-dried at 130°C for 30 seconds to produce layer 12 prior to coating with Formulation H to produce hydrophilic layer 8.

Examples 13 and 14

The procedure of Example 12 was followed except that Formulation E (Example 13) and Formulation F (Example 14) were used instead of Formulation D to produce layer 12.

- 24 -

Example 15

Referring to Figure 4, an aluminized polyester film 20 comprises a polyester layer 22 and an aluminium layer 24. Formulation H was applied over the layer 24 as described in Example 6 to produce hydrophilic layer 8.

Example 16Imaging the lithographic plates

10

The plates prepared as described in Examples 6 to 15 were cut into discs of 105 mm diameter and placed on a rotatable disc that could be rotated at a constant speed of either 100 or 250 revolutions per minute. Adjacent to the rotatable disc, a translating table held a laser beam source so that it impinged normal to the disc, while the translating table moved the laser beam radially in a linear fashion with respect to the rotatable disc. The exposed image was in the form of a spiral whereby the image in the centre of the spiral represented slow laser scanning speed and long exposure time and the outer edge of the spiral represented fast scanning speed and short exposure time.

25 The laser used was a single mode 830 nm wavelength 200mW laser diode which was focused to a 10 micron spot. The laser power supply was a stabilised constant current source.

30 Example 17Processing after imaging

The exposed disc was immersed in fount solution which removed the imaged coating areas leaving the exposed spiral image. The larger the diameter of the resulting

35

- 25 -

spiral image the less the exposure time required to form the image.

Results

5

(i) Discs having layers of type 6, 12 and 24 can be ablated imagewise when subjected to IR radiating to produce printing plates having oleophilic image layers comprised by layer 4 (Figures 1 to 3) or layer 22 (Figure 4) and hydrophilic layers comprised by layer 8.

10

(ii) Adhesion of layer 8 to the underlying layer is strongest for discs having a separate binder layer 10 (Figure 2) or a binder material (e.g. titanium dioxide) incorporated in the IR sensitive/ablatable layer as in layer 12 (Figure 3).

15

(iii) Discs were produced which, at a speed of 100 rpm, produced a well-defined image at up to 40mm radius; were fully ablated at up to 7 mm radius; and accepted ink in imaged areas at up to 10 mm radius.

20

The reader's attention is directed to all papers and documents which are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference.

25

All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

30

35

- 26 -

Each feature disclosed in this specification (including any accompanying claims, abstract and drawings), may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly
5 stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

The invention is not restricted to the details of the
10 foregoing embodiment(s). The invention extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any
15 method or process so disclosed.

- 27 -

CLAIMS

1. A method of preparing a planographic printing member comprising a support, an ablatable layer and a hydrophilic layer, said method including forming said hydrophilic layer by application of a fluid comprising a silicate.
2. A method according to Claim 1, wherein said silicate does not include organic functional groups.
3. A method according to Claim 1 or Claim 2, wherein said silicate is substantially water soluble.
4. A method according to any preceding claim, wherein said silicate is an alkaline silicate.
5. A method according to any preceding claim, wherein said silicate solution comprises only sodium silicate.
6. A method according to any preceding claim, wherein said fluid applied in said method comprises a silicate solution in which particulate material is dispersed.
7. A method according to Claim 6, wherein said particulate material comprises a first material which has a hardness of greater than 3 Modified Mohs (on a scale of 0 - 15).
8. A method according to Claim 7, wherein said first material is alumina.
9. A method according to any of Claims 6 to 8, wherein said particulate material includes a second material which is a pigment.

- 28 -

10. A method according to any preceding claim, wherein said ablatable layer includes a first binder which is a polymeric material.

5 11. A method according to any preceding claim, wherein said ablatable layer includes a second binder material adapted to increase the adhesion of the ablatable layer to said hydrophilic layer as compared to when said second material is not present.

10

12. A method according to Claim 11, wherein said second binder material is inorganic.

13. A method according to any of Claims 1 to 9, wherein
15 said ablatable layer comprises a metal.

14. A method according to any preceding claim, wherein said hydrophilic layer is provided over said ablatable layer.

20

15. A method according to any preceding claim, wherein a binder layer for adhesion purposes is provided between the ablatable and hydrophilic layers.

25 16. A method according to Claim 15, wherein said binder layer for adhesion purposes comprises a polymeric material optionally in combination with an inorganic material.

17. A planographic printing member preparable by a method
30 according to any of Claims 1 to 16.

18. A planographic printing member comprising a support, an ablatable layer and a hydrophilic layer, said hydrophilic layer comprising a binder material derived or
35 derivable from a silicate.

- 29 -

19. A printing member according to Claim 18, wherein said binder material is derived from at least 60 wt% silicate.

20. A method of preparing a planographic printing member
5 having ink-accepting and non-ink-accepting areas, the method comprising exposing a planographic printing member comprising a support, an ablatable layer and a hydrophilic layer which includes a material derived or derivable from a silicate, to radiation which causes ablation of said
10 ablatable layer.

21. A planographic printing member comprising a support, an ablatable layer and a hydrophilic layer, wherein said ablatable layer includes a second binder material adapted
15 to increase the adhesion of the ablatable layer to the hydrophilic layer as compared to when said second material is not present.

1/1

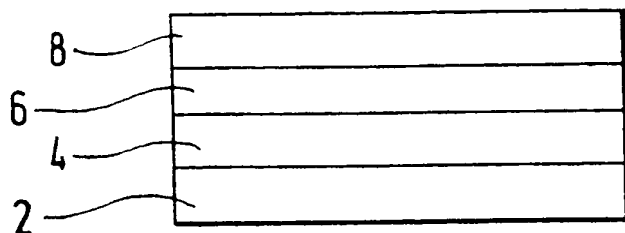


Fig.1.

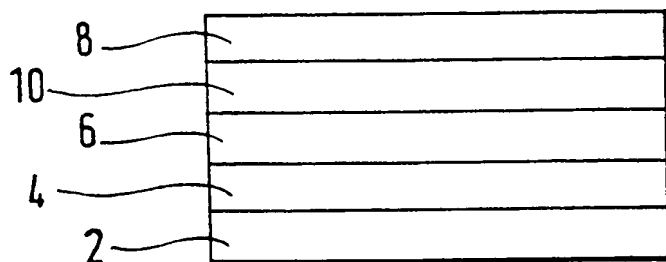


Fig.2.

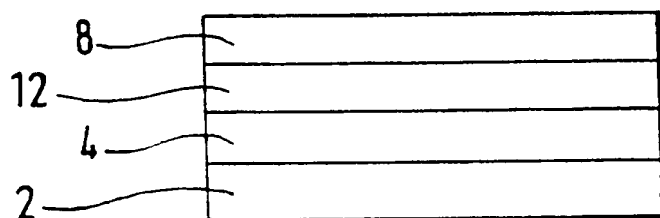


Fig.3.

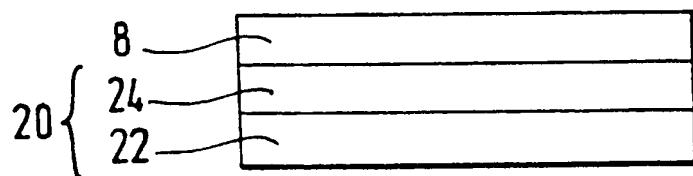


Fig.4.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 96/00366

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 E41N3 13 B41N1 14 B41C1 10

Address for correspondence: Patent Co. (UK) Ltd., 100, Brook Road, London, W14 7AA, UK

B. FIELDS SEARCHED

Manual or automatic searches have been carried out in the following fields:

IPC 6 E41N B41C

Documentation searched other than that of the International Bureau in the extent that such documents are included in the fields searched

Electronic data base consulted during the international search: name of data base and, where practical, search terms used

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category: Citation of document with indication, where appropriate, of the relevant passages

Relevant to claim No.

X WO 94 18005 A (AGFA-GEVAERT N.V.) 18 August 1994
cited in the application
see page 1, line 1 - line 7
see page 3, line 4 - line 14
see page 5, line 1 - line 27
see page 6, line 13 - line 26
see claims 1.2.6-9; examples 1.4

1.3.6.
9-21

X US 3 470 013 A (R.L. WAGNER) 30 September 1969
see column 1, line 36 - column 3, line 52
see claims 1.9.12-17; example 1

1-9.
17-21

-/-

☒ Further documents are cited in the description and claims

☒ Patent family members are listed in annex

Special categories of cited documents

- A. document defining the general state of the art which is not considered to be of particular relevance
- B. earlier document published on or after the international filing date
- C. document which may throw doubts on priority claim even though it is cited to establish the publication date in another instance or other special reason as specified
- D. document relating to an oral disclosure (see exception in other means)
- E. document published prior to the international filing date but later than the priority date claimed

- F. later document published after the international filing date of priority date and not in conflict with the application of cited to understand the principle of the invention
- G. document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- H. document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is compared with the prior art other such documents, such information being given to a person skilled in the art
- I. document member of the same patent family

Date of the actual inspection of the international application

Date of issuance of the international search report

20 May 1998

29/05/1998

Name of the international search authority
European Patent Office (EPO) - Munich, Germany
Tel: 089 36 90 100
Fax: 089 36 90 101
E-mail: epo@epo.ch

Name of the international search authority
EBCOM, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/00266

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
X	PATENT ABSTRACTS OF JAPAN vol. 13, no. 67 (M-798), 15 February 1989 & JP 63 268642 A (SHOWA ALUM CORPORATION), 7 November 1988, see abstract -----	1-9, 12, 14, 17-19
A	US 3 181 461 A (H.A.FROMSON) 4 May 1965 see column 1, line 7 - line 33 see column 1, line 45 - column 2, line 2 see column 3, line 5 - line 25 see claims 1-15; figures 1-4; example 1 -----	1-21
P, A	WO 97 19819 A (HORSELL GRAPHIC INDUSTRIES LIMITED) 5 June 1997 see page 1, line 1 - line 8 see page 3, line 26 - line 34 see page 4, line 22 - page 9, line 9 see page 15, line 21 - page 16, line 7 see claims 1-22; examples 1-5 -----	1-21

INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No.

PCT/GB 96 00166

Patent document No. in International Report	Kind of document	Publication date	Patent document No. in International Report	Kind of document	Publication date
WO 9418005	A	18-08-1994	DE 69402537	B	15-05-1997
			EP 0683722	A	29-11-1995
			JP 2592225	B	19-03-1997
			JP 8507727	T	20-08-1996
US 3470013	A	30-09-1969	DE 1621963	A	15-07-1971
			GB 1141556	A	
US 3181461	A	04-05-1965	CH 446883	A	
			DE 1471707	A	23-01-1969
			FR 1405281	A	26-11-1965
			GB 1069283	A	
			US 3280734	A	25-10-1966
WO 9719819	A	05-06-1997	AU 7633696	A	19-06-1997



1/1

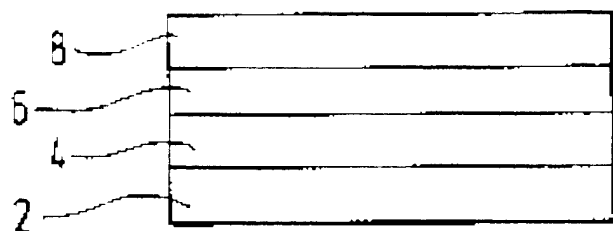


Fig. 1.

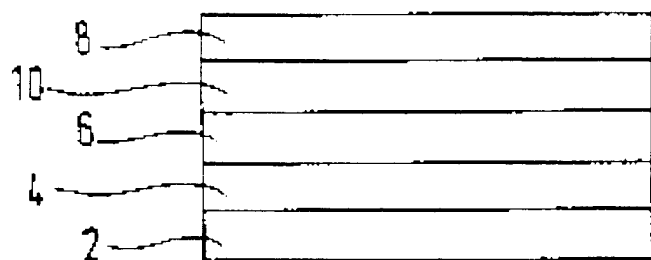


Fig. 2.

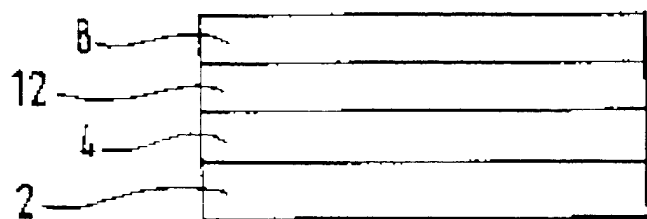


Fig. 3.

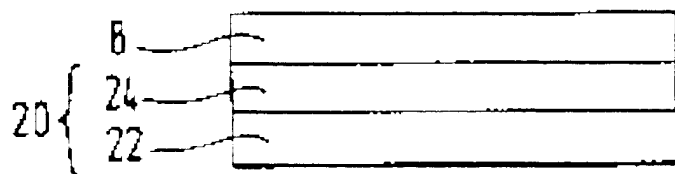


Fig. 4.

